

627 RIVERBANK DRIVE  
GENEVA, IL 60134

## Test Report

[www.riverbankacoustics.com](http://www.riverbankacoustics.com)

630-232-0104

FOUNDED 1918 BY  
WALLACE CLEMENT SABINE

SPONSOR: **OEG Building Materials**  
Sayreville, NJ

**Sound Transmission Loss**  
**RAL™-TL24-431**

CONDUCTED: 2024-09-23

Page 1 of 15

ON: 3-5/8" Phantom 20 Wall (24"o.c.) with OEG RC-MAX-18, Double Layer 5/8" Type-X on Source Side, Single Layer 5/8" Type-X on Receive Side

### TEST METHODOLOGY

Riverbank Acoustical Laboratories™ is accredited by the U.S. Department of Commerce, National Institute of Standards and Technology (NIST) under the National Voluntary Laboratory Accreditation Program (NVLAP) as an ISO 17025:2017 Laboratory (NVLAP Lab Code: 100227-0) and for this test procedure. The test reported in this document conformed explicitly with ASTM E90-09 (2016): "Standard Test Method for Laboratory Measurement of Airborne Sound Transmission Loss of Building Partitions and Elements." The single number rating of the specimen was calculated according to ASTM E413-22: "Classification for Rating Sound Insulation." A description of the measurement procedure and room specifications is available upon request. The transmission loss values are for a single direction of measurement. The results presented in this report apply to the sample as received from the test sponsor.

### INFORMATION PROVIDED BY SPONSOR

The test specimen was designated by the sponsor as 3-5/8" Phantom 20 Wall (24"o.c.) with OEG RC-MAX-18, Double Layer 5/8" Type-X on Source Side, Single Layer 5/8" Type-X on Receive Side. The following nominal product information was provided by the sponsor prior to testing. The accuracy of such sponsor-provided information can affect the validity of the test results.

#### **Product Under Test**

Product Name: Phantom 20 Tracks, Phantom 20 Studs, RC-MAX-18  
Manufacturer: OEG Building Materials

### SPECIMEN MEASUREMENTS & TEST CONDITIONS

The building contractor (Seth Priser) and RAL staff compiled a detailed construction specification as follows:

#### **Tracks (Top & Bottom) (Product Under Test)**

Material: Phantom 20 Tracks  
Manufacturer: OEG Building Materials  
Dimensions: 2 tracks @ 2448 mm (96.375 in.) wide by 32 mm (1.25 in.) high  
Depth: 92 mm (3.625 in.)  
Steel Thickness: 0.52 mm (0.0206 in.)  
Installation: Friction fit over foam sill sealer  
Overall Weight: 3.18 kg (7 lbs)  
Mass per Unit Length: 0.65 kg/m (0.44 lbs/ft)



RIVERBANK ACOUSTICAL LABORATORIES IS ACCREDITED BY NVLAP (LAB CODE 100227-0) FOR ACOUSTICAL TESTING SERVICES IN ACCORDANCE WITH ISO/IEC 17025:2017 AND FOR THIS PROCEDURE. THIS REPORT MUST NOT BE USED BY THE CLIENT TO CLAIM PRODUCT CERTIFICATION, APPROVAL, OR ENDORSEMENT BY RAL, NVLAP, NIST, OR ANY AGENCY OF THE U.S. GOVERNMENT.

THIS REPORT SHALL NOT BE MODIFIED WITHOUT THE WRITTEN APPROVAL OF RAL. THE RESULTS REPORTED APPLY ONLY TO THE SPECIFIC SAMPLE SUBMITTED FOR TESTING; RAL ASSUMES NO RESPONSIBILITY FOR THE PERFORMANCE OF ANY OTHER SAMPLE.

627 RIVERBANK DRIVE  
GENEVA, IL 60134

## Test Report

[www.riverbankacoustics.com](http://www.riverbankacoustics.com)

630-232-0104

FOUNDED 1918 BY  
WALLACE CLEMENT SABINE

### OEG Building Materials

2024-09-23

**RAL™-TL24-431**

Page 2 of 15

### SPECIMEN MEASUREMENTS & TEST CONDITIONS (continued)

#### Studs (Product Under Test)

Material: Phantom 20 Studs  
Manufacturer: OEG Building Materials  
Dimensions: 5 studs @ 32 mm (1.25 in.) wide by 2740 mm (107.875 in.) high  
Depth: 92 mm (3.625 in.)  
Steel Thickness: 0.53 mm (0.0207 in.)  
Stud Spacing: Studs spaced 610 mm (24 in.) on center  
Installation: Side studs each fastened to test frame at midpoint with 1 screw each  
Studs fastened to top and bottom tracks, 1 screw at each connection point  
Fasteners: 8# wafer head stud screws, length @ 13 mm (0.5 in.)  
Overall Weight: 8.85 kg (19.5 lbs)  
Mass per Unit Length: 0.65 kg/m (0.43 lbs/ft)

*Note: A bead of acoustical sealant was used to seal the source side of the specimen where framing members met the test frame (1.02 kg (2.25 lbs) total).*

#### Insulation

Material: R-13 unfaced fiberglass  
Dimensions: 4 pieces @ 610 mm (24 in.) wide by 2438 mm (96 in.) high  
4 pieces @ 610 mm (24 in.) wide by 305 mm (12 in.) high  
Depth: 92 mm (3.625 in.)  
Installation: Friction fit between studs  
Overall Weight: 7.03 kg (15.5 lbs)  
Mass per Unit Volume: 11.4 kg/m<sup>3</sup> (0.71 lbs/ft<sup>3</sup>)

#### Source Room Side

##### **Resilient Channel (Product Under Test)**

Material: RC-MAX-18  
Manufacturer: OEG Building Materials  
Dimensions: 6 pieces @ 2438 mm (96 in.) wide by 64 mm (2.5 in.) high  
Depth: 13 mm (0.5 in.)  
Steel Thickness: 0.5 mm (0.0195 in.)  
Installation: Top and bottom rows spaced 102 mm (4 in.) apart from test frame  
Other rows spaced 610 mm (24 in.) on center  
Bottom row inverted  
Fasteners: 8# wafer head stud screws, length @ 13 mm (0.5 in.)  
Overall Weight: 3.86 kg (8.5 lbs)  
Mass per Unit Length: 0.26 kg/m (0.18 lbs/ft)



RIVERBANK ACOUSTICAL LABORATORIES IS ACCREDITED BY NVLAP (LAB CODE 100227-0) FOR ACOUSTICAL TESTING SERVICES IN ACCORDANCE WITH ISO/IEC 17025:2017 AND FOR THIS PROCEDURE. THIS REPORT MUST NOT BE USED BY THE CLIENT TO CLAIM PRODUCT CERTIFICATION, APPROVAL, OR ENDORSEMENT BY RAL, NVLAP, NIST, OR ANY AGENCY OF THE U.S. GOVERNMENT.

THIS REPORT SHALL NOT BE MODIFIED WITHOUT THE WRITTEN APPROVAL OF RAL. THE RESULTS REPORTED APPLY ONLY TO THE SPECIFIC SAMPLE SUBMITTED FOR TESTING; RAL ASSUMES NO RESPONSIBILITY FOR THE PERFORMANCE OF ANY OTHER SAMPLE.

627 RIVERBANK DRIVE  
GENEVA, IL 60134

## Test Report

[www.riverbankacoustics.com](http://www.riverbankacoustics.com)

630-232-0104

FOUNDED 1918 BY

WALLACE CLEMENT SABINE

**RAL™-TL24-431**

Page 3 of 15

**OEG Building Materials**

2024-09-23

### SPECIMEN MEASUREMENTS & TEST CONDITIONS (continued)

#### Source Room Side (continued)

---

##### **Base Layer**

Material: Type X gypsum board  
Dimensions: 2 panels @ 1219 mm (48 in.) wide by 2743 mm (108 in.) high  
Thickness: 16 mm (0.625 in.)  
Installation: Panels installed vertically and fastened to studs with screws  
Fasteners: Type S bugle head drywall screws, length @ 25 mm (1 in.)  
Fastener Spacing: 406 mm (16 in.) on center  
Overall Weight: 72.91 kg (160.75 lbs)  
Mass Per Unit Area: 10.90 kg/m<sup>2</sup> (2.23 lbs/ft<sup>2</sup>)

##### **Face Layer**

Dimensions: 1 panel @ 1219 mm (48 in.) wide by 2743 mm (108 in.) high  
2 panels @ 610 mm (24 in.) wide by 2743 mm (108 in.) high  
Thickness: 16 mm (0.625 in.)  
Installation: Panels installed vertically, fastened to studs through base layer with screws  
Panel joints staggered from base layer panel joints  
Fasteners: Type S bugle head drywall screws, length @ 41 mm (1.625 in.)  
Fastener Spacing: 406 mm (16 in.) on center  
Overall Weight: 73.14 kg (161.25 lbs)  
Mass Per Unit Area: 10.93 kg/m<sup>2</sup> (2.24 lbs/ft<sup>2</sup>)

#### Receive Room Side

---

Material: Type X gypsum board  
Dimensions: 1 panel @ 1219 mm (48 in.) wide by 2743 mm (108 in.) high  
2 panels @ 610 mm (24 in.) wide by 2743 mm (108 in.) high  
Thickness: 16 mm (0.625 in.)  
Installation: Panels installed vertically, fastened to studs with screws  
Panel joints staggered from source side base layer panel joints  
Fasteners: Type S bugle head drywall screws, length @ 32 mm (1.25 in.)  
Fastener Spacing: 406 mm (16 in.) on center  
Overall Weight: 73.71 kg (162.5 lbs)  
Mass Per Unit Area: 11.02 kg/m<sup>2</sup> (2.26 lbs/ft<sup>2</sup>)

*Note: Joints between gypsum board panels, and screw heads on both sides of the partition were treated with a thin bead of acoustical sealant and metal tape (0.45 kg (1 lbs) total).*



RIVERBANK ACOUSTICAL LABORATORIES IS ACCREDITED BY NVLAP (LAB CODE 100227-0) FOR ACOUSTICAL TESTING SERVICES IN ACCORDANCE WITH ISO/IEC 17025:2017 AND FOR THIS PROCEDURE. THIS REPORT MUST NOT BE USED BY THE CLIENT TO CLAIM PRODUCT CERTIFICATION, APPROVAL, OR ENDORSEMENT BY RAL, NVLAP, NIST, OR ANY AGENCY OF THE U.S. GOVERNMENT.

THIS REPORT SHALL NOT BE MODIFIED WITHOUT THE WRITTEN APPROVAL OF RAL. THE RESULTS REPORTED APPLY ONLY TO THE SPECIFIC SAMPLE SUBMITTED FOR TESTING; RAL ASSUMES NO RESPONSIBILITY FOR THE PERFORMANCE OF ANY OTHER SAMPLE.

627 RIVERBANK DRIVE  
GENEVA, IL 60134

## Test Report

[www.riverbankacoustics.com](http://www.riverbankacoustics.com)

630-232-0104

FOUNDED 1918 BY

WALLACE CLEMENT SABINE

**OEG Building Materials**

**RAL™-TL24-431**

2024-09-23

Page 4 of 15

### SPECIMEN MEASUREMENTS & TEST CONDITIONS (continued)

#### Overall Specimen Measurements

Dimensions: 2.44 m (96.0 in) wide by 2.74 m (108.0 in) high  
Thickness: 0.15 m (6.0 in)  
Weight: 244.15 kg (538.25 lbs)  
Overall Area: 6.689 m<sup>2</sup> (72. ft<sup>2</sup>)  
Mass per Unit Area: 36.50 kg/m<sup>2</sup> (7.48 lbs/ft<sup>2</sup>)

#### Test Aperture

Opening Size: 2.74 m (9.0 ft.) by 4.27 m (14.0 ft.)  
Filler Wall: Yes  
Aperture Size: 2.44 m (96.0 in) wide by 2.74 m (108.0 in) high  
Transmission Area: 6.689 m<sup>2</sup> (72. ft<sup>2</sup>)  
Sealed: Entire periphery (both sides) with dense mastic

#### Test Environment

##### Source Room

Volume: 177.11 m<sup>3</sup>  
Temperature: 22.8 °C ± 0.0 °C  
Relative Humidity: 57.0 % ± 0.0 %

##### Receive Room

Volume: 178.33 m<sup>3</sup>  
Temperature: 22.2 °C ± 0.0 °C  
Relative Humidity: 55.0 % ± 2.0 %

##### Requirements

Temperature: 22° C +/- 2° C, not more than 3° C change over all tests.  
Relative Humidity: ≥ 30%, not more than +/- 3% change over all tests.



NVLAP LAB CODE 100227-0

RIVERBANK ACOUSTICAL LABORATORIES IS ACCREDITED BY NVLAP (LAB CODE 100227-0) FOR ACOUSTICAL TESTING SERVICES IN ACCORDANCE WITH ISO/IEC 17025:2017 AND FOR THIS PROCEDURE. THIS REPORT MUST NOT BE USED BY THE CLIENT TO CLAIM PRODUCT CERTIFICATION, APPROVAL, OR ENDORSEMENT BY RAL, NVLAP, NIST, OR ANY AGENCY OF THE U.S. GOVERNMENT.

THIS REPORT SHALL NOT BE MODIFIED WITHOUT THE WRITTEN APPROVAL OF RAL. THE RESULTS REPORTED APPLY ONLY TO THE SPECIFIC SAMPLE SUBMITTED FOR TESTING; RAL ASSUMES NO RESPONSIBILITY FOR THE PERFORMANCE OF ANY OTHER SAMPLE.

627 RIVERBANK DRIVE  
GENEVA, IL 60134

630-232-0104

## Test Report

[www.riverbankacoustics.com](http://www.riverbankacoustics.com)

FOUNDED 1918 BY  
WALLACE CLEMENT SABINE

**RAL™-TL24-431**

Page 5 of 15



Figure 1 – Specimen mounted in test aperture, as viewed from source room



Figure 2 – Specimen mounted in test aperture, as viewed from receive room

627 RIVERBANK DRIVE  
GENEVA, IL 60134

## Test Report

[www.riverbankacoustics.com](http://www.riverbankacoustics.com)

630-232-0104

FOUNDED 1918 BY  
WALLACE CLEMENT SABINE

**OEG Building Materials**

**RAL™-TL24-431**

2024-09-23

Page 6 of 15



Figure 3 – Tracks, studs, and resilient channel installed in test aperture; insulation partially installed



Figure 4 – Detail of resilient channel installed to studs, viewed from source room side

627 RIVERBANK DRIVE  
GENEVA, IL 60134

630-232-0104

## Test Report

[www.riverbankacoustics.com](http://www.riverbankacoustics.com)

FOUNDED 1918 BY  
WALLACE CLEMENT SABINE

**RAL™-TL24-431**

Page 7 of 15



Figure 5 – Detail of side stud fastened to test frame, viewed from receive room side



Figure 6 – Base layer of source room side gypsum board installed, as viewed from source room

627 RIVERBANK DRIVE  
GENEVA, IL 60134

630-232-0104

## Test Report

[www.riverbankacoustics.com](http://www.riverbankacoustics.com)

FOUNDED 1918 BY  
WALLACE CLEMENT SABINE

**RAL™-TL24-431**

Page 8 of 15

**OEG Building Materials**  
2024-09-23



Figure 7 – Source room side gypsum installed, insulation partially installed, viewed from receive room side



Figure 8 – Insulation installed in stud cavities, viewed from receive room side



627 RIVERBANK DRIVE  
GENEVA, IL 60134

630-232-0104

## Test Report

[www.riverbankacoustics.com](http://www.riverbankacoustics.com)

FOUNDED 1918 BY  
WALLACE CLEMENT SABINE

**RAL™-TL24-431**

Page 9 of 15



Figure 9 – Gypsum board partially installed on receive room side of studs

627 RIVERBANK DRIVE  
GENEVA, IL 60134

**Test Report**

[www.riverbankacoustics.com](http://www.riverbankacoustics.com)

630-232-0104

FOUNDED 1918 BY  
WALLACE CLEMENT SABINE

**OEG Building Materials**

**RAL™-TL24-431**

2024-09-23

Page 10 of 15

TEST RESULTS

Sound transmission loss values are tabulated at the eighteen standard frequency bands. A graphic presentation of the data and additional information appear on the following pages. The precision of the transmission loss test data is within the limits set by the ASTM Standard E90-09 (2016). See Appendix A for identification of corrections applied to the reported data.

<u>FREQ.</u>	<u>TL</u>	<u>ΔTL</u>	<u>DEF.</u>	<u>FREQ.</u>	<u>TL</u>	<u>ΔTL</u>	<u>DEF.</u>
100	26	0.71	0	800	62	0.20	0
125	35	0.83	5	1000	65	0.14	0
160	40	0.57	3	1250	66	0.08	0
200	43	0.41	3	1600	62	0.12	0
250	48	0.38	1	2000	54	0.09	6
315	52	0.39	0	2500	54	0.10	6
400	55	0.22	0	3150	59	0.06	1
500	58	0.30	0	4000	63	0.07	0
630	60	0.20	0	5000	65	0.11	0

STC=56

ABBREVIATION INDEX

- FREQ. = 1/3 OCTAVE BAND CENTER FREQUENCY, Hz
- TL = TRANSMISSION LOSS, dB
- ΔTL = 95% CONFIDENCE INTERVAL FOR TL MEASUREMENTS, dB
- DEF. = DEFICIENCIES, dB BELOW SHIFTED STC CONTOUR (SUM OF DEF = 25)
- STC = SOUND TRANSMISSION CLASS

Tested by *Marc Sciaky*  
Marc Sciaky  
Senior Experimentalist

Report by *Keith Kimberling*  
Keith Kimberling  
Test Engineer

Approved by *Eric P. Wolfram*  
Eric P. Wolfram  
Laboratory Manager



RIVERBANK ACOUSTICAL LABORATORIES IS ACCREDITED BY NVLAP (LAB CODE 100227-0) FOR ACOUSTICAL TESTING SERVICES IN ACCORDANCE WITH ISO/IEC 17025:2017 AND FOR THIS PROCEDURE. THIS REPORT MUST NOT BE USED BY THE CLIENT TO CLAIM PRODUCT CERTIFICATION, APPROVAL, OR ENDORSEMENT BY RAL, NVLAP, NIST, OR ANY AGENCY OF THE U.S. GOVERNMENT. THIS REPORT SHALL NOT BE MODIFIED WITHOUT THE WRITTEN APPROVAL OF RAL. THE RESULTS REPORTED APPLY ONLY TO THE SPECIFIC SAMPLE SUBMITTED FOR TESTING; RAL ASSUMES NO RESPONSIBILITY FOR THE PERFORMANCE OF ANY OTHER SAMPLE.

627 RIVERBANK DRIVE  
 GENEVA, IL 60134  
 630-232-0104

**Test Report**

[www.riverbankacoustics.com](http://www.riverbankacoustics.com)

FOUNDED 1918 BY  
 WALLACE CLEMENT SABINE


**RAL™-TL24-431**

Page 11 of 15

**OEG Building Materials**  
 2024-09-23

**SOUND TRANSMISSION REPORT**

3-5/8" Phantom 20 Wall (24"o.c.) with OEG RC-MAX-18, Double Layer 5/8" Type-X on Source Side, Single Layer 5/8" Type-X on Receive Side

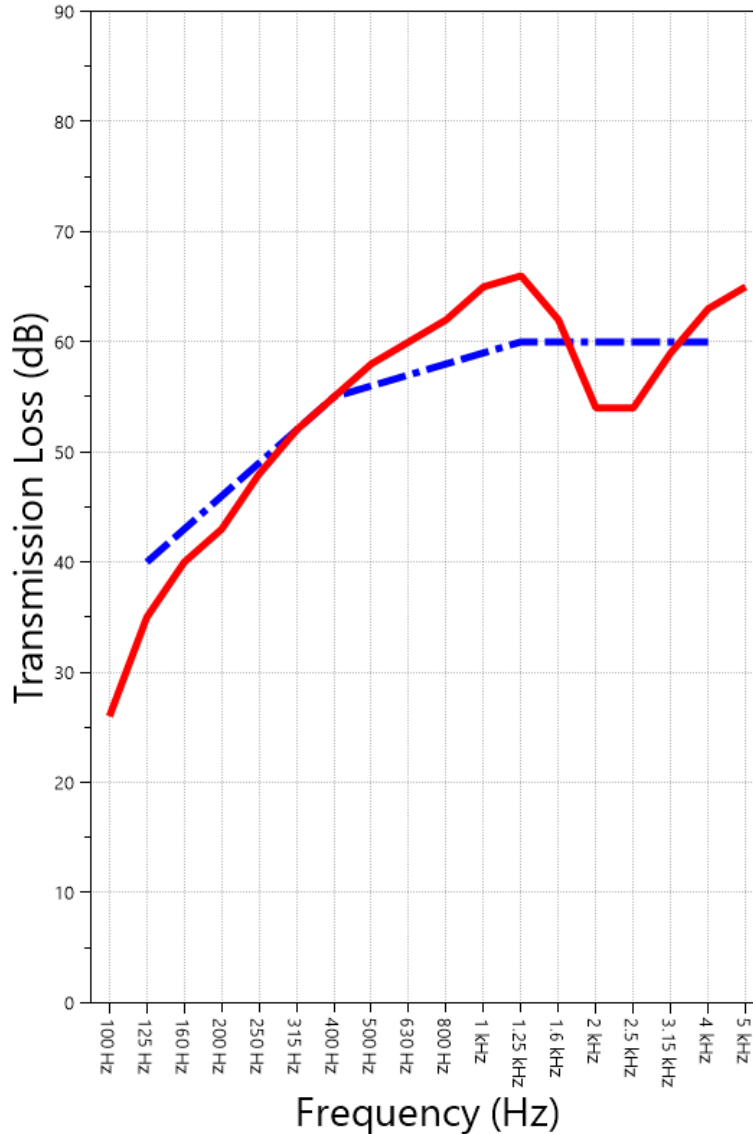

**STC=56**

**OITC=36**



**TRANSMISSION LOSS**

**SOUND TRANSMISSION CLASS CONTOUR**



RIVERBANK ACOUSTICAL LABORATORIES IS ACCREDITED BY NVLAP (LAB CODE 100227-0) FOR ACOUSTICAL TESTING SERVICES IN ACCORDANCE WITH ISO/IEC 17025:2017 AND FOR THIS PROCEDURE. THIS REPORT MUST NOT BE USED BY THE CLIENT TO CLAIM PRODUCT CERTIFICATION, APPROVAL, OR ENDORSEMENT BY RAL, NVLAP, NIST, OR ANY AGENCY OF THE U.S. GOVERNMENT.

THIS REPORT SHALL NOT BE MODIFIED WITHOUT THE WRITTEN APPROVAL OF RAL. THE RESULTS REPORTED APPLY ONLY TO THE SPECIFIC SAMPLE SUBMITTED FOR TESTING; RAL ASSUMES NO RESPONSIBILITY FOR THE PERFORMANCE OF ANY OTHER SAMPLE.

627 RIVERBANK DRIVE  
 GENEVA, IL 60134  
 630-232-0104

**Test Report**

[www.riverbankacoustics.com](http://www.riverbankacoustics.com)

FOUNDED 1918 BY  
 WALLACE CLEMENT SABINE

**RAL™-TL24-431**

Page 12 of 15

**OEG Building Materials**  
 2024-09-23

**APPENDIX A: Extended Frequency Range Data**

Specimen: 3-5/8" Phantom 20 Wall (24"o.c.) with OEG RC-MAX-18, Double Layer 5/8" Type-X on Source Side, Single Layer 5/8" Type-X on Receive Side (See Full Report)

*The following non-accredited data were obtained in accordance with ASTM E90-09 (2016), but extend beyond the defined frequency range of 100Hz to 5,000Hz. These unofficial results are representative of the RAL test environment only and intended for research & comparison purposes. Sampling precision observed during this procedure is reported below. Corrections are detailed in Appendix B.*

1/3 Octave Band Center Frequency (Hz)	Sound Transmission Loss (dB)	Applicable Corrections	ΔTL (Eq. A2.5) (dB)	Repeatability (dB)
31.5	21	ZZ F	0.92	1.01
40	20	Z F	0.57	2.26
50	15		0.87	1.52
63	11		0.83	1.47
80	18		0.62	0.60
100	26		0.71	0.67
125	35		0.83	0.71
160	40	Z F	0.57	0.35
200	43	Z F	0.41	0.33
250	48	Z F	0.38	0.42
315	52	Z	0.39	0.41
400	55		0.22	0.46
500	58		0.30	0.18
630	60		0.20	0.26
800	62		0.20	0.24
1000	65	Z F	0.14	0.27
1250	66	Z F	0.08	0.15
1600	62		0.12	0.12
2000	54		0.09	0.13
2500	54		0.10	0.19
3150	59		0.06	0.14
4000	63		0.07	0.17
5000	65		0.11	0.17
6300	69	Z	0.10	0.21
8000	69	Z F	0.17	0.50
10000	63	Z F	0.22	1.21
12500	57	Z F	0.27	1.74



RIVERBANK ACOUSTICAL LABORATORIES IS ACCREDITED BY NVLAP (LAB CODE 100227-0) FOR ACOUSTICAL TESTING SERVICES IN ACCORDANCE WITH ISO/IEC 17025:2017 AND FOR THIS PROCEDURE. THIS REPORT MUST NOT BE USED BY THE CLIENT TO CLAIM PRODUCT CERTIFICATION, APPROVAL, OR ENDORSEMENT BY RAL, NVLAP, NIST, OR ANY AGENCY OF THE U.S. GOVERNMENT.

THIS REPORT SHALL NOT BE MODIFIED WITHOUT THE WRITTEN APPROVAL OF RAL. THE RESULTS REPORTED APPLY ONLY TO THE SPECIFIC SAMPLE SUBMITTED FOR TESTING; RAL ASSUMES NO RESPONSIBILITY FOR THE PERFORMANCE OF ANY OTHER SAMPLE.

### APPENDIX B: Glossary of Standardized Corrections and Adjustments

Specimen: 3-5/8" Phantom 20 Wall (24"o.c.) with OEG RC-MAX-18, Double Layer 5/8" Type-X on Source Side, Single Layer 5/8" Type-X on Receive Side (See Full Report)

#### Mark

#### Interpretation

*A*

Measured sound pressure levels in the receive room are within 10 dB of the ambient noise level at the marked frequency band. Receive room levels used to calculate Transmission Loss are corrected according to ASTM E90 Section 10.3.

*AA*

Measured sound pressure levels in the receive room are within 5 dB of the ambient noise level at the marked frequency band. Receive room levels used to calculate Transmission Loss are corrected according to ASTM E90 Section 10.3.1. Transmission Loss values calculated from levels corrected this way will be less than or equal to Transmission Loss values from a hypothetical test using the same specimen and a receive room with idealized ambient sound levels of  $(-\infty)$  dB.

*F*

The reported Transmission Loss is within 10 dB of the laboratory flanking limit at the marked frequency band. The measured performance of the specimen may be limited by the performance of the laboratory building structure at this frequency band.

*Z*

The reported Transmission Loss at the marked frequency band has been corrected according to ASTM E90 Section A3.2.7 to account for possible sound transmission through the filler assembly.

*ZZ*

The reported Transmission Loss at the marked frequency band has been corrected according to ASTM E90 Section A3.2.8 to account for possible sound transmission through the filler assembly. Transmission Loss values corrected this way will be less than or equal to Transmission Loss values from a hypothetical test using the same specimen and an idealized filler assembly with a Sound Transmission Class rating of  $(\infty)$ .

### APPENDIX C: Glossary of Variability Metrics

Specimen: 3-5/8" Phantom 20 Wall (24"o.c.) with OEG RC-MAX-18, Double Layer 5/8" Type-X on Source Side, Single Layer 5/8" Type-X on Receive Side (See Full Report)

$\Delta$ TL, the 95% confidence interval for reported transmission loss values, is calculated from the standard deviation of the sets of measurements for source room sound pressure level, receive room sound pressure level, and receive room sound absorption. This metric is calculated in an effort to quantify the combined influences of room geometry, microphone positioning, and other varying environmental conditions on reported results.

**Repeatability**, expressed as a 95% confidence interval, is calculated from the standard deviation of transmission loss as obtained from a set of six (6) consecutive tests conducted according to this test method by RAL on 2020-02-13. The tests were performed on a specimen composed of 24 gauge steel paneling, using the same test opening as used in this report. This metric provides an estimate of the variation in results that might be observed if the test were repeated with no change to the installed specimen. Note that repeatability will vary with the construction type.

627 RIVERBANK DRIVE  
 GENEVA, IL 60134  
 630-232-0104

**Test Report**

[www.riverbankacoustics.com](http://www.riverbankacoustics.com)

FOUNDED 1918 BY  
 WALLACE CLEMENT SABINE

**RAL™-TL24-431**

Page 14 of 15

**OEG Building Materials**

2024-09-23

**APPENDIX D: Determination of Outdoor Indoor Transmission Class (OITC)**

Specimen: 3-5/8" Phantom 20 Wall (24"o.c.) with OEG RC-MAX-18, Double Layer 5/8" Type-X on Source Side, Single Layer 5/8" Type-X on Receive Side (See Full Report)

The determination of the Outdoor Indoor Transmission Class (OITC) as reported below was made with explicit conformity to the procedures described in the ASTM E1332-22 test standard. Test Method ASTM E90-09 (2016) was used to obtain the sound transmission loss data. This rating is based on an average transportation noise source spectrum and an A-weighted sound level reduction, either of which may be inappropriate for some applications.

One-third Octave Band Center Frequency, Hz	Reference Sound Spectrum, dB	Test Specimen Transmission Loss, dB
80	103	18
100	102	26
125	101	35
160	98	40
200	97	43
250	95	48
315	94	52
400	93	55
500	93	58
630	91	60
800	90	62
1000	89	65
1250	89	66
1600	88	62
2000	88	54
2500	87	54
3150	85	59
4000	84	63

*OITC = 36*



RIVERBANK ACOUSTICAL LABORATORIES IS ACCREDITED BY NVLAP (LAB CODE 100227-0) FOR ACOUSTICAL TESTING SERVICES IN ACCORDANCE WITH ISO/IEC 17025:2017 AND FOR THIS PROCEDURE. THIS REPORT MUST NOT BE USED BY THE CLIENT TO CLAIM PRODUCT CERTIFICATION, APPROVAL, OR ENDORSEMENT BY RAL, NVLAP, NIST, OR ANY AGENCY OF THE U.S. GOVERNMENT.

THIS REPORT SHALL NOT BE MODIFIED WITHOUT THE WRITTEN APPROVAL OF RAL. THE RESULTS REPORTED APPLY ONLY TO THE SPECIFIC SAMPLE SUBMITTED FOR TESTING; RAL ASSUMES NO RESPONSIBILITY FOR THE PERFORMANCE OF ANY OTHER SAMPLE.

627 RIVERBANK DRIVE  
GENEVA, IL 60134

## Test Report

[www.riverbankacoustics.com](http://www.riverbankacoustics.com)

630-232-0104

FOUNDED 1918 BY

WALLACE CLEMENT SABINE

**RAL™-TL24-431**

Page 15 of 15

**OEG Building Materials**

2024-09-23

### **APPENDIX E: Instruments of Traceability**

Specimen: 3-5/8" Phantom 20 Wall (24"o.c.) with OEG RC-MAX-18, Double Layer 5/8" Type-X on Source Side, Single Layer 5/8" Type-X on Receive Side (See Full Report)

<b><u>Description</u></b>	<b><u>Model</u></b>	<b><u>Serial Number</u></b>	<b><u>Date of Certification</u></b>	<b><u>Calibration Due</u></b>
System 2	3160-A-042	3160-106968	2024-07-19	2025-07-19
Bruel & Kjaer Mic And Preamp C	Type 4943-B-001	2311439	2024-03-29	2025-03-29
Bruel & Kjaer Pistonphone	Type 4228	2781248	2024-07-19	2025-07-19
EXTECH Hygro 663	SD700	A083663	2023-12-28	2024-12-28
EXTECH Hygro 639	SD700	A.103639	2023-12-01	2024-12-01

### **APPENDIX F: Revisions to Original Test Report**

Specimen: 3-5/8" Phantom 20 Wall (24"o.c.) with OEG RC-MAX-18, Double Layer 5/8" Type-X on Source Side, Single Layer 5/8" Type-X on Receive Side (See Full Report)

<b><u>Date</u></b>	<b><u>Revision</u></b>
2024-10-11	Original report issued

---

END



RIVERBANK ACOUSTICAL LABORATORIES IS ACCREDITED BY NVLAP (LAB CODE 100227-0) FOR ACOUSTICAL TESTING SERVICES IN ACCORDANCE WITH ISO/IEC 17025:2017 AND FOR THIS PROCEDURE. THIS REPORT MUST NOT BE USED BY THE CLIENT TO CLAIM PRODUCT CERTIFICATION, APPROVAL, OR ENDORSEMENT BY RAL, NVLAP, NIST, OR ANY AGENCY OF THE U.S. GOVERNMENT.

THIS REPORT SHALL NOT BE MODIFIED WITHOUT THE WRITTEN APPROVAL OF RAL. THE RESULTS REPORTED APPLY ONLY TO THE SPECIFIC SAMPLE SUBMITTED FOR TESTING; RAL ASSUMES NO RESPONSIBILITY FOR THE PERFORMANCE OF ANY OTHER SAMPLE.